

## Noise countermeasure products

## Cable accessories.Mainproducts goods

- 1 Ferite core Division Ferite Core [SR・SRM・SRS types]

About details. Please attach under the URL



- 2 Shield tube standard tube [E6A series]

About details. Please attach under the URL



- 3 Heat shield sheet Mirror Stat [E18MB series]

About details. Please attach under the URL



- 4 Earth clamp Wire fixed type earth [A・AD types]

About details. Please attach under the URL



- 5 Spiral Conductivity Spiral [E06P series]

About details. Please attach under the URL



- 6 Cable connector S C Lock [SC series]

About details. Please attach under the URL

<https://www.seiwa.co.jp/product/>



Industrial EtherNet LAN Cable  
Optical Cable Optical Terminal Box  
Robot Cable Instrumentation Cable  
Network LAN Construction

**Net System**

ネットシステム(タイ) 株式会社

Net System (Thai) Co.,Ltd

Din Daeng,Din Daeng, Bangkok 10400

TEL 02-640-5674 FAX 02-640-5673

<http://www.ns-tha.com>

## SC rock Frameretardant type (UL conform type) SCT

### Out line & summary

- When turn to the Cap, Lock to the sound, It is so fixed feeling.
- Using polyamido material(UL94V-approved)for frame returndant & good mechanical material.
- Correspondence cable diameter widly available.
- Just like always did IP67 water proof keeping.
- Retrieving UL-514B (File No,E319359)



※RoHS2 Shireikiisei 10 material contain below standard value



Style NO	Fix Cables Diameter (mm)	Screw (D1)		Fix Diameter	Thickness M(mm)	Qty S.Box(p)	stock (THA)
		(管G)呼称	(厚G)呼称				
SCT-10	φ 6.5~10.5	G3/8	—	φ 17	4mm	10	
SCT-14	φ 10.5~14.5	G1/2	CTG16	φ 22	4mm	10	
SCT-18	φ 14.5~18.5	G3/4	CTG22	φ 28	4mm	10	
SCT-20	φ 16.0~20.0	G3/4	CTG22	φ 28	4mm	10	
SCT-22	φ 18.5~22.5	G1	CTG28	φ 34	4mm	5	

M : max      s. : small

Price(Small Box)	
sells price	s.price

s. : standard

Using temperture band : -30°C~85°C

Caution :

Cap can not be fix before using.

When the cap fix or remove can be condition tem. at 10°C over.

Industrial EtherNet LAN Cable  
Optical Cable    Optical Terminal Box  
Robot Cable    Instrumentation Cable  
Network LAN Construction

**Net System**

ネットシステム(タイ) 株式会社

Net System (Thai) Co.,Ltd

Din Daeng,Din Daeng, Bangkok. 10400

TEL 02-640-5674 FAX 02-640-5673


<http://www.ns-tha.com>

## SC LOCK SCH Type (For optical fiber)

### Over View & Feature(out line & summary)

- For Optical Fiber Cable, It is possible Optical Fiber Cable(Fctype,Sctype) keep attached 2wires
- It is possible one optical fiber cable still translation for Fctype Optical fiber. (only 2hole type)
- The rubber press directly on the cap,cable hold type by good waterproof&Strong cable clamping force after cap prevent loosing.
- SC,FC both connector can be use.
- SC,FC both connector can be pass through until 2 wires.
- Cable and Assy. After easy to inside BOX. So it increase work effieciy.
- UL94V-0 Certified materials by using. Resistant to Flame retardant, organic solvents & polyamido with excellent mechanical strength.

※RoHS2 ShireiKisei 10material contain below the standard value.

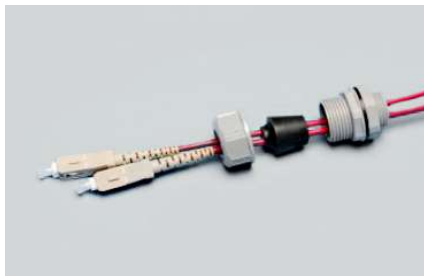

SCコネクタ(2本)

構成図



ロックナット ゴムパッキン 本体 ゴムスリーブ キャップ

Style NO	Optical Fiber Spec.	Screw(D1)		Fit diameter	bord thick max(mm)	Qty S.box(P)	stock (THA)
		material	thick				
SCH-101	φ 2.8 single type	G3/8		φ 17	4	10	
SCH-102	φ 2.8 double type	G3/8					

price(small.B)	
Sells.Pr	Price

Using temreture band : -30°C~85°C

Caution


Cap can not be fix before using.

When the cap fix or remove can be condition tem. at 10°C over.


## UD Protector UDstyle (general purpose type)

### Over view & Feature


- Since there is no extreme protrusion on the floor surface. After laying there is no need to worry about catching with a trolley or tripping over it. And it is safe to lay in the aisle.
- It has excellent mechanical strength & impact resistance, and it is a structure that can withstand enough even if a transport trolley passes over the protector.
- The color tone is three colors, light brown gray, and ivory, which is excellent in design and matches the floor surface on office.
- Laying with an adhesive tape and nailing is also possible for construction.
- Set up cable guide, it is easy storage work. (Only UDN0, UDN1, UDN2)
- This product is cable wiring only. (cannot be used for IV wire)
- About back tape. Please contact our staff.




UDNO-1(2)G Gray  
UDNO-1(2)C Ivory  
UDNO-1(2)L light brown

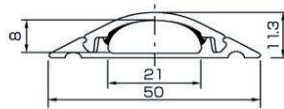

UDN1-1(2)G Gray  
UDN1-1(2)C Ivory  
UDN1-1(2)L light brown

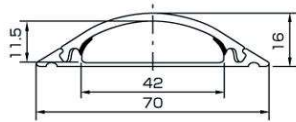

UDN2-1(2)G Gray  
UDN2-1(2)C Ivory  
UDN2-1(2)L light brown

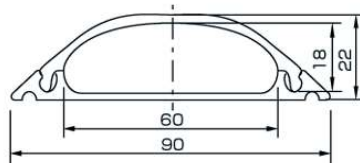

UD3-1(2)G Gray  
UD3-1(2)C Ivory  
UD3-1(2)L light brown

### Joint・Endunit



L type bend



T type 3way

Packing 10PCS 1m type (Last No 1G/1C/1L)  
2m type (Last No 2G/2C/2L)

Industrial EtherNet LAN Cable  
Optical Cable Optical Terminal Box  
Robot Cable Instrumentation Cable  
Network LAN Construction

**Net System**

ネットシステム(タイ) 株式会社

Net System (Thai) Co.,Ltd

Din Daeng, Din Daeng, Bangkok 10400

TEL 02-640-5674 FAX 02-640-5673

<http://www.ns-tha.com>

Termal insulation sheet (Mirror Star)

Outline & Characteristic

- Easy rework & easy apply .
  - Do not dirty adhesion surface.
  - Height solar reflectance & water proof.
- Ryoewa made Heat shield paint : E18X-S150 series.


- This sheet is cheaper more than installing heat shield paint
  - Enviromentally friendly acrylic resin Pet .
- ※RoHS2 ShireiKisei 10material contain below the standard value.

特性


試験①: 室外機に遮熱シートを設置した際の対策効果を確認  
約20°Cの対策効果



試験②: 屋外暴露試験  
一般塗料を塗布したサンプル ・ 遮熱シートを貼り付けたサンプルで比較

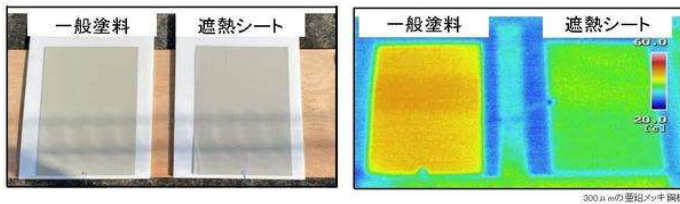

試験③: 日東工業様製P20-55BA赤外光暴露試験  
恒温槽40°C、赤外光照射(1120W/m<sup>2</sup>)  
BOX空間温度測定

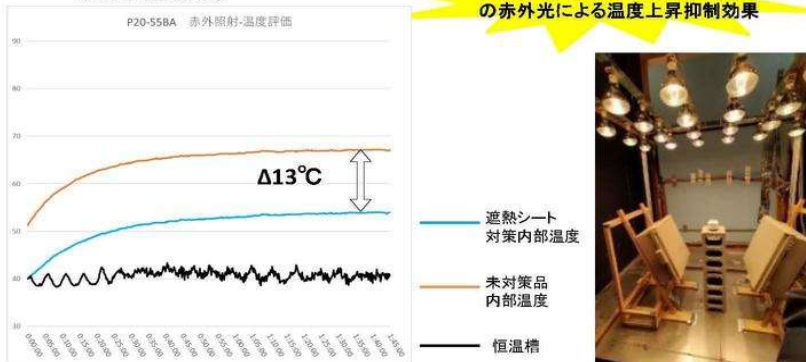

<b>E18MB Type</b>
980mm(E W : 950mm)
length:10M (beige)
SR : 88%

<b>E18MB-1M Type</b>
980mm(E W : 950mm)
length:1M (beige)
SR : 88%

SR : solar reflectivity

Industrial EtherNet LAN Cable  
Optical Cable Optical Terminal Box  
Robot Cable Instrumentation Cable  
Network LAN Construction

Net System

ネットシステム(タイ) 株式会社

Net System (Thai) Co.,Ltd

Din Daeng, Din Daeng, Bangkok 10400

TEL 02-640-5674 FAX 02-640-5673

<http://www.ns-tha.com>