


●หางปลาเปลือย แบบกลม (F)

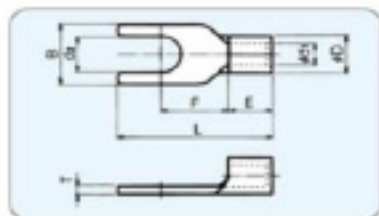

RoHS directive

มาตรฐาน		ตัด	รหัสสินค้า	ชิ้นส่วน มีด								ขนาดของสาย ชวง			พอดี้ เครื่องมือ	จำนวน ชิ้น (ชิ้น)								
UL	CSA			Φd2	B	L	F	E	ΦD	Φd1	T	เบรค เต็มเต็ม mm	สายเคเบิล mm	AWG										
○		●	F0.3-3	3.2	5.2	12.5	5.9	4.0	2.3	0.8	0.65	0.32~	0.1~	26-24	DS-031· DH-1B·DS-A5	100								
○		●	F0.3-4	4.3	6.6	15.0	7.7					0.6	0.3			100								
○	○	●	F0.5-3	3.2	5.2	12.5	5.9	4.0	2.3	1.2	0.5	0.5~	0.2~	24-20	DS-031 DH-1B DS-A5	100								
○	○	●	F0.5-3.5	3.7	6.6	15.0	7.7									0.8	0.5	100						
○	○	●	F0.5-4	4.3	6.6	15.0	7.7									100								
○	○	●	F1.25-M3	3.2	5.6	14.2	5.0	4.5	3.4	1.7	0.8	0.57~	0.25~	22-16	DS-031 DS-H12 DS-H18 DH-1B DS-A5 DS-Hi34S	100								
○	○	●	F1.25-3	3.2	6.0	14.2	4.4									100								
○	○	●	F1.25-L3	3.2	5.9	15.6	6.5									100								
○	○	●	F1.25-S3.5	3.7	5.7	13.5	6.3									100								
○	○	●	F1.25-3.5	3.7	6.0	14.2	4.4									100								
○		●	F1.25-V3.5	3.7	5.7	15.2	6.3									100								
○	○	●	F1.25-L3.5	3.7	5.9	15.6	6.5									100								
○	○	●	F1.25-A3.5	3.7	6.4	15.4	6.5									100								
○	○	●	F1.25-S4	4.3	6.4	15.6	6.8									100								
○	○	●	F1.25-4	4.3	7.0	16.2	6.5									100								
○	○	●	F1.25-5	5.3	8.0	16.8	7.0									100								
○	○	●	F2-3	3.2	5.5	14.2	4.4									4.5	4.2	2.3	0.8	1.14~	1.04~	16-14	DS-H12 DS-H18 DS-H214 DH-1B DS-A5 DS-E14 DS-Hi34S	100
○	○	●	F2-S3.5	3.7	5.7	15.7	6.5																	100
○	○	●	F2-3.5	3.7	6.5	15.8	6.0	100																
○	○	●	F2-S4	4.3	6.6	15.8	8.0	100																
○	○	●	F2-4	4.3	6.9	16.2	7.2	100																
○	○	●	F2-5	5.3	8.5	17.2	8.5	100																
○	○	●	F2-6	6.4	11.0	20.2	9.5	100																