


●หางปลาเปลือย แบบกลม (R)

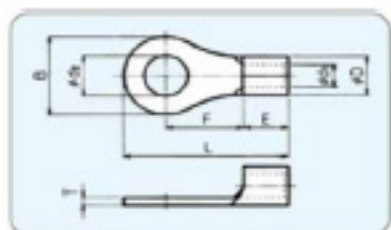

RoHS directive

มาตรฐาน			ตัด	รหัสสินค้า	ชิ้นส่วน มัด							ขนาดของสาย ช่วง			พอดี้ เครื่องมือ	จำนวนชิ้น (ชิ้น)	
JIS	UL	GSA			Φd2	B	L	F	E	ΦD	Φd1	T	เบรคเพิ่มเต็ม mm	สายเดี่ยว mm			AWG
○	○	○		R1.25-3	3.2	5.5	12.0	4.8	4.5	3.4	1.7	0.8	0.57~ 1.44	0.25~ 1.65	22-16	DS-031	100
○	○	○		R1.25-3.5	3.7	6.6	14.4	6.6								DS-H12	100
	○	○	●	R1.25-S4	4.3	6.6	14.4	6.6								DS-H18	100
○	○	○		R1.25-4	4.3	8.0	15.5	7.5								DS-1B	100
○	○	○		R1.25-5	5.3	8.0	15.5	7.5								DS-A5	100
	○	○	●	R1.25-6	6.4	11.5	20.2	10.0								DS-Hi34	100
	○	○	●	R2-3	3.2	6.6	13.0	5.2	4.5	4.2	2.3	0.8	1.14~ 1.82	1.04~ 2.63	16-14	DS-H12	100
○	○	○		R2-3.5	3.7	6.6	13.0	5.2								DS-H18	100
	○	○	●	R2-S4	4.3	6.6	16.0	8.3								DS-H214	100
○	○	○		R2-4	4.3	8.5	16.5	7.8								DS-1B	100
○	○	○		R2-5	5.3	9.5	17.0	7.8								DS-A5	100
○	○	○		R2-6	6.4	12.0	21.5	11.0								DS-Hi34	100
	○	○	●	R3.5-4	4.3	8.5	17.8	8.3	5.3	5.0	3.0	1.0	1.82~ 2.4	2.63~ 4.6	12	DS-H18	100
	○	○	●	R3.5-5	5.3	8.5	17.8	8.3								DS-H214อื่น ๆ	100
○	○	○		R5.5-4	4.3	9.5	19.5	8.5	6.3	5.6	3.4	1.0	1.82~ 2.89	2.63~ 6.64	12-10	DS-H18	100
	○	○	●	R5.5-S5	5.3	8.0	18.8	8.5								DS-H214	100
○	○	○		R5.5-5	5.3	9.5	19.5	8.5								DS-1B	100
	○		●	R5.5-S6	5.4	9.5	19.5	8.5								DS-A5	100
○	○	○		R5.5-6	5.4	12.0	22.5	10.2								DS-E14	100